

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/028850 A1

(51) International Patent Classification⁷: **F02M 31/20**,
F28D 7/02, F28F 13/06, 1/14

(21) International Application Number:
PCT/EP2004/052259

(22) International Filing Date:
21 September 2004 (21.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO2003A 000743
24 September 2003 (24.09.2003) IT

(71) Applicant (for all designated States except US): **DAYCO
FUEL MANAGEMENT S.p.A.** [IT/IT]; Via Andrea Do-
ria, 15, I-10123 Torino (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DEFILIPPI, Roberto**
[IT/IT]; Via Isonzo, 123/8, I-10141 Torino (IT).

(74) Agents: **JORIO, Paolo** et al.; Studio Torta S.r.l., Via
Viotti, 9, I-10121 Torino (IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A COOLING DEVICE FOR A FUEL-RECIRCULATION CIRCUIT

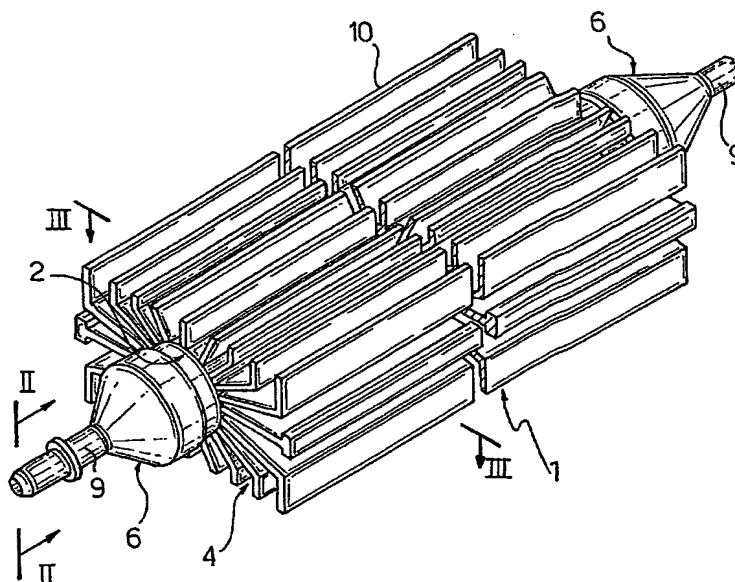

(57) Abstract: Described herein is a cooling device (1) for a fuelrecirculation circuit from the injection system to the tank of a motor vehicle, which has a first opening (8) and a second opening (8) for connection to said recirculation circuit and comprises a pipe (2) and a finned radiant body (4) in a relationship of heat exchange with the pipe (2), in which the pipe (2) is defined by a through cavity (3) of the radiant body (4) and comprises guide means (7) for guiding the flow of fuel, said guide means (7) being housed in said pipe (2) in order to define at least one path of flow of the fuel adjacent to a side wall of the pipe (2).



WO 2005/028850 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.